


## 15' - 18' x 5' ALUMINUM SLIDE GATE

(ASG-185)

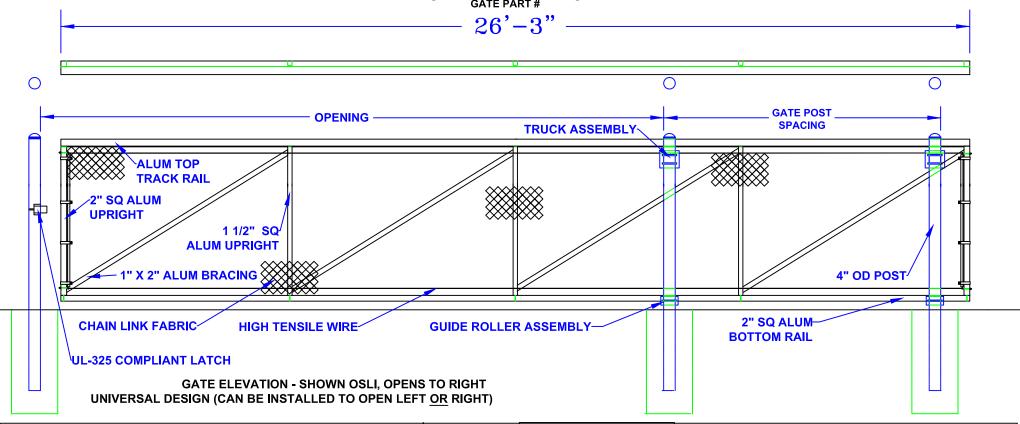

Notes:	OPENING	GATE POST SPACING	
1. SPECIFICATIONS CAN BE CHANGED BY SHARON FENCE COMPANY ONLY. 2. FOOTING TO BE (4)X POST WIDTH. MIN DEPTH TO BE 36" [914 MM].	15'	11'-0"	
3. GATES MAY BE MANUALLY OR ELECTRICALLY OPERATED. HARDWARE WILL VARY.	16'	10'-0"	Approved By:
4. GATES TABULATED ARE UL-325 COMPLIANT. 5. GATES ARE UNIVERSAL (OPEN TO LEFT OR RIGHT).	17'	9'-0"	
6. TOP TRACK AND RAIL: ENCLOSED 1-PC ALUMINUM (6061-T6) EXTRUSION (3.83 LBS PER LF)	18'	8'-0"	Date:
8. 1" x 2" ALUMINUM DIAGONAL BRACING WELDED TO 2" SQUARE ALUMINUM UPRIGHTS.	10	] 0-0	