


15' - 18' x 6' ALUMINUM SLIDE GATE (ASG-186)

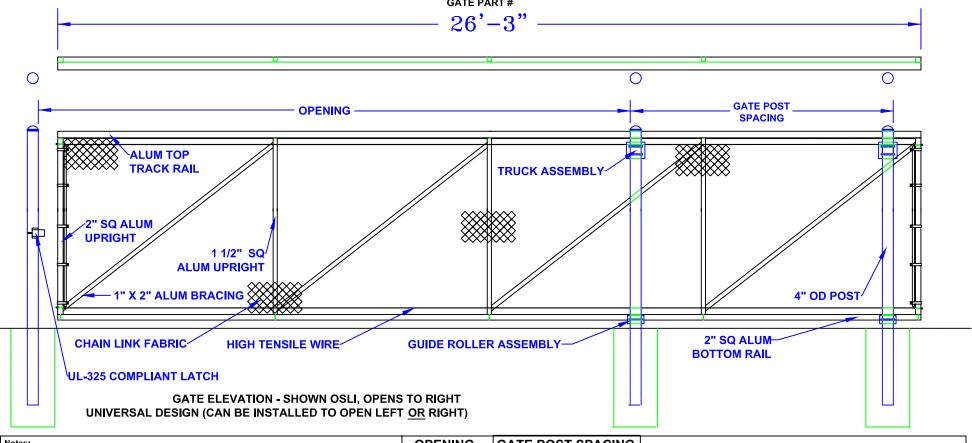

1101001							
1		SP	EC	IFI	CA	١T	O

- ONS CAN BE CHANGED BY SHARON FENCE COMPANY ONLY.
- 2. FOOTING TO BE (4)X POST WIDTH. MIN DEPTH TO BE 36" [914 MM].
- 3. GATES MAY BE MANUALLY OR ELECTRICALLY OPERATED. HARDWARE WILL VARY.
- 4. GATES TABULATED ARE UL-325 COMPLIANT.
- 5. GATES ARE UNIVERSAL (OPEN TO LEFT OR RIGHT).
- 6. TOP TRACK AND RAIL: ENCLOSED 1-PC ALUMINUM (6061-T6) EXTRUSION (3.83 LBS PER LF)
- 8. 1" x 2" ALUMINUM DIAGONAL BRACING WELDED TO 2" SQUARE ALUMINUM UPRIGHTS.

OPENING	GATE POST SPACING
15'	11'-0"
16'	10'-0"
17'	9'-0''
18'	8'-0"

Approved By: