


15' - 18' x 7' ALUMINUM SLIDE GATE

(ASG-187)

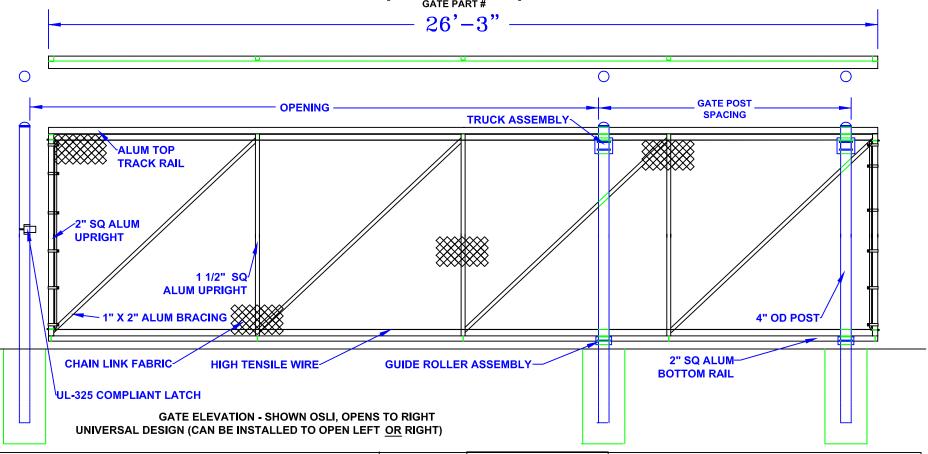

Notes:

- 1. SPECIFICATIONS CAN BE CHANGED BY SHARON FENCE COMPANY ONLY.
- 2. FOOTING TO BE (4)X POST WIDTH. MIN DEPTH TO BE 36" [914 MM].
- 3. GATES MAY BE MÁNUALLY OR ELECTRICALLY OPERATED. HARDWARE WILL VARY.
- 4. GATES TABULATED ARE UL-325 COMPLIANT.
- 5. GATES ARE UNIVERSAL (OPEN TO LEFT OR RIGHT).
- 6. TOP TRACK AND RAIL: ENCLOSED 1-PC ALUMINUM (6061-T6) EXTRUSION (3.83 LBS PER LF)
- 8. 1" x 2" ALUMINUM DIAGONAL BRACING WELDED TO 2" SQUARE ALUMINUM UPRIGHTS.

OPENING	GATE POST SPACING	
15'	11'-0"	Approved By:
16'	10'-0"	Approved by
17'	9'-0"	<u></u>
18'	8'-0"	Date: