


## 27' - 30' X 5' HIGH ALUMINUM SLIDE GATE (ASG-305)

GATE PART #

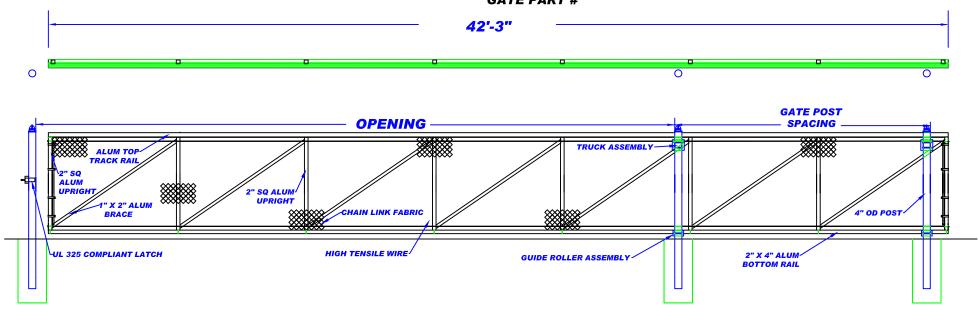

GATE ELEVATION - SHOWN OSLI, OPENS TO RIGHT UNIVERSAL DESIGN (CAN BE INSTALLED TO OPEN LEFT  $\ \underline{OR}\ RIGHT)$ 

Notes: 1. SPECIFICATIONS CAN BE CHANGED BY SHARON FENCE COMPANY ONLY.	OPENING	GATE POST SPACING	
2. FOOTING TO BE (4)X POST WIDTH. MIN DEPTH TO BE 36" [914 MM]. 3. GATES MAY BE MANUALLY OR ELECTRICALLY OPERATED. HARDWARE WILL VARY.	27'	15'-0"	Approved By:
4. GATES TABULATED ARE UL-325 COMPLIANT. 5. GATES ARE UNIVERSAL (OPEN TO LEFT OR RIGHT).	28'	14'-0"	Approved By:
6. TOP TRACK AND RAIL: ENCLOSED 1-PC ALUMINUM (6061-T6) EXTRUSION (3.83 LBS PER LF) REINFORCED BY WELDING AN ADDITIONAL 2" SQ. ALUMINUM LATERAL SUPPORT RAIL.	29'	13'-0"	Date:
7. 1" X 2" ALUMINUM DIAGONAL BRACING WELDED TO 2" SQUARE ALUMINUM UPRIGHTS.	30'	12'-0"	