


27' - 30' X 7' HIGH ALUMINUM SLIDE GATE (ASG-307) (ASG-BW30)

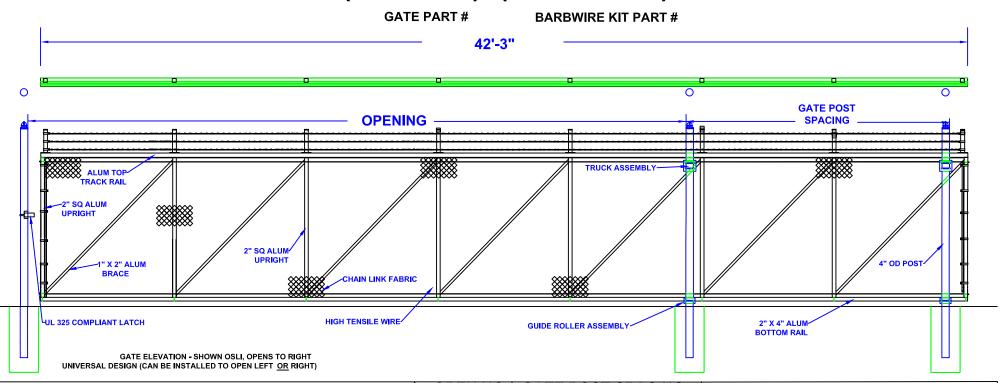

Notes:	OPENI	NG GAT	E POST SPACING		
1. SPECIFICATIONS CAN BE CHANGED BY SHARON FENCE 2. FOOTING TO BE (4)X POST WIDTH. MIN DEPTH TO BE 36 3. GATES MAY BE MANUALLY OR ELECTRICALLY OPERAT	" [914 MM] 27'		15'-0"	Annuariad Dire	
4. GATES TABULATED ARE UL-325 COMPLIANT. 5. GATES ARE UNIVERSAL (OPEN TO LEFT OR RIGHT).	28'		14'-0"	Approved By:	
6. TOP TRACK AND RAIL: ENCLOSED 1-PC ALUMINUM (606 REINFORCED BY WELDING AN ADDITIONAL 2" SQ. ALU			13'-0"	Date:	
7. 1" X 2" ALUMINUM DIAGONAL BRACING WELDED TO 2" S	SQUARE ALUMINUM UPRIGHTS. 30'		12'-0"		